

Express Mail Mailing Label EL312681613US

Date of Deposit May 24, 1999

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. §1.10 on the date indicated above and is addressed to the Commissioner of Patents, Box Patent Application, Washington, D.C. 20231.

Sheila K. Mathews

Typed or printed name of person mailing paper or fee

(Signature of person mailing paper or fee)

May 24, 1999

THE COMMISSIONER OF PATENTS & TRADEMARKS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the
patent application of:

Inventor: David H. Decker et al
For: Translator Terminal For Two Or More Wireless Networks
Doc. No.: 99CR021/KE

Enclosed are:

☒ 2 Sheet of Drawings.

☒ An Assignment of Invention to Rockwell Collins, Inc., Cedar Rapids, IA 52498.

☒ Combined Declaration and Power of Attorney.

☐ Information Disclosure Statement and references.

For	Number Filed	Claims as Filed Number Extra	Rate	Base Fee	\$760.00
Total Claims	20 - 20	0	X \$18	\$	0.00
Ind. Claims	3 - 3	0	X \$78	\$	0.00
Total Filing Fee				\$	760.00

☒ Please charge my Deposit Account No. 18-1722 in the amount of \$760.00. A duplicate copy of this sheet is enclosed.

☒ Please charge my Deposit Account No. 18-1722 in the amount of \$40.00 for the Assignment recording fee.

☒ The Commissioner is hereby authorized to charge any additional fees which may be required during the pendency of this application for present filing fees under 37 CFR 1.17, and for later presentation of extra claims under 36 CFR 1.16, or credit any overpayment to Account No. 18-1722. A duplicate copy of this sheet is enclosed.

Respectfully submitted,



Kyle Eppele
Attorney of Record
Reg. No. 34,155

Rockwell Collins, Inc.
Intellectual Property Department
400 Collins Road NE M/S 124-323
Cedar Rapids, IA 52498
Telephone (319) 295-8280
Facsimile No. (319) 295-8777

PATENT
99CR021/KE

U.S. PATENT APPLICATION
for
TRANSLATOR TERMINAL FOR TWO OR MORE WIRELESS
NETWORKS

Inventors: David H. Decker
Gerald W. Egeberg
James F. English
Gene S. Parker
Scott J. F. Zogg


Express Mail Mailing Label EL312681613US

Date of Deposit May 24, 1999

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. §1.10 on the date indicated above and is addressed to the Commissioner of Patents, Box Patent Application, Washington, D.C. 20231.

Sheila K. Mathews

Typed or printed name of person mailing paper or fee


(Signature of person mailing paper or fee)

TRANSLATOR TERMINAL FOR TWO OR MORE WIRELESS NETWORKS

FIELD OF THE INVENTION

The present invention relates to communication networks. More particularly, the present invention relates to wireless or spread-spectrum communication networks for communicating secured data.

BACKGROUND OF THE INVENTION

Wireless communication systems generally are utilized to transfer information in the form of radio frequency (RF) signals between terminals or receiver/transmitter units. The terminals can be arranged in a wireless network where terminals communicate information with each other.

Generally, the proprietor or entity which controls the network, as well as the users of the terminals, does not wish anyone else to receive information transmitted across the wireless network. Therefore, the data or information is usually encrypted in accordance with a secret encryption scheme so only users to whom the terminals have been given are allowed to receive the information (e.g., a secure network). The terminals typically have decryption capabilities.

In certain communication systems and applications, communication between a first wireless network and a second wireless network may be desirable. The first wireless network can be a secure network which utilizes a first encryption scheme to transfer data among first terminals. The second wireless network can be a secure network or a non-secure network that allows communication among second terminals. If the second network is a secure network, data is transmitted in accordance with a second encryption scheme.

Generally, the terminals of the first network cannot transmit information to terminals of the second network. Therefore, information in the first network cannot be transmitted to the second network without providing the first encryption scheme or hardware for receiving the data from the first network to the proprietor or controller of the second network. However, providing such information or such a device to the controller of the second network can jeopardize the security of the first network during and after the exchange of information between the first and second network.

For example, the United States government and its military forces often utilize a Link 16 wireless network to communicate data or information among Link 16 terminals. The information can include tactical, positioning, navigational, and other information utilized by military intelligence and other government institutions. Link 16 transmitters and receivers (i.e., terminals) can be mounted on a variety of platforms, including aircraft, naval ships, or even backpack worn by army personnel.

In general, the information in a Link 16 network is transmitted across the airwaves via radio signals (e.g., at frequencies of 969 to 1206 megahertz), which are encrypted on 51 different channels so only users who possess Link 16 terminals can receive the information. The information can be sensitive information, such as, a tactical picture of battlefield conditions, identification of friends and foes, voice communication, or navigational information. The National Security Agency (NSA) tightly regulates the sale and use of terminals or devices capable of operating with a Link 16 network. Generally, the NSA requires that Link 16 terminals be controlled by U.S. forces or very close allies of the United States to protect encryption techniques utilized in Link 16 networks.

Nonetheless, certain foreign countries or other entities require the use of a secure wireless or spread spectrum network for communicating information similar to information communicated on the Link 16 network. In times of international cooperation, the United States government would like to be able to exchange tactical information with certain countries utilizing a second type of network. To make this possible, the United States government would have to supply encryption devices capable of translating the Link 16 information to the certain countries. Supplying such devices to powers outside of direct United States government control jeopardizes the security of the Link 16 network and, therefore, the NSA does not approve of this action.

Another possible solution involves Link 16-like terminals having a country-unique encryption device. The country-unique encryption device or terminal could be reconfigured (e.g., by programming or by changing hardware when interoperability within Link 16 terminals is required). This solution has four major problems: 1). The solution requires a major force-wide maintenance operation at a time of potential international crises; 2). It potentially allows a foreign entity complete access to all United States data and Link 16 data when it may be only desirable to exchange some of the tactical data on the Link 16 network; 3) It would allow foreign governments to be able to analyze the modification, thereby reverse engineering the device to obtain constant Link 16 capability; 4) It anticipates that it would require that the United States would be willing to supply encryption devices during times of international cooperation and crisis.

Thus, there is a need for an apparatus for and a method of integrating two or more wireless networks. Further, there is a need for a simple method of allowing foreign governments limited access to Link 16 information. Further still, there is a need for a Link 16-link network that can access Link 16 information under control of the United States government.

SUMMARY OF THE INVENTION

The present invention relates to a translator for use with a first wireless network and a second wireless network. The first wireless network includes first terminals communicating in a first encrypted format. The second wireless network includes second terminals communicating in a second encrypted format or in a non-encrypted format. The translator communicates with the first terminals in the first encrypted format and communicates with the second terminals in the second encrypted format or in the non-encrypted format. The translator communicates selected information from the first network to the second network.

The present invention further relates to a method of communicating in a communication network. The communication network includes a first secure wireless network and a second secure wireless network. The first secure wireless network includes first terminals and the second secure wireless network includes second terminals. The method includes communicating data among the first terminals in a first format, communicating data among the second terminals in a second format, translating selected data in the first format to translated data in the second format, and communicating the translated data to the second terminals.

The present invention even further relates to a communication system including a first means for communicating radio signals in a first encrypted format, a second means for communicating radio signals in a second encrypted format or in a non-encrypted format, and a translator means for communicating with the first means in the first encrypted format and for communicating with the second means in the second format or in a non-encrypted format. The translator means communicates selected data from the first means to the second means.

BRIEF DESCRIPTION OF THE DRAWINGS

Exemplary embodiments of the present invention are described below with reference to the accompanying drawings, wherein like numerals denote like elements, and:

FIGURE 1 is a block diagram showing a communication system including a first network and a second network in accordance with an exemplary embodiment of the present invention; and

FIGURE 2 is a block diagram of a translator in accordance with another exemplary embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

With reference to FIGURE 1, a communication system 10 includes a wireless network 12 and a wireless network 24. Wireless network 12 includes terminals 14. Terminals 14 communicate with each other via radio signals. The radio signals are encrypted. Communication system 10 preferably includes a Link 16 secured network. Alternatively, system 10 can be any type of spread spectrum communication system.

Preferably, wireless network 12 is a Link 16 wireless network and terminals 14 are Link 16 terminals (e.g., transmitter/receiver unit). Link 16 is a spread spectrum tactical data link used by the United States military. Terminals 14 can transmit tactical, positioning, and navigational information in an encrypted format.

Wireless communication network 24 includes terminals 26. Terminals 26 communicate radio signals in a non-encrypted or in an encrypted format. Preferably, the format utilized by terminals 14 is different than the format utilized by terminals 26. Terminals 26 are preferably Link-16 like terminals which do not have the same special U.S. encryption capabilities. Terminals 26 can be Link 16 terminals which are modified to have a country unique cryptological ability.

Terminals 14 preferably transmit on fifty-one channels in a frequency range of 969 to 1212 mHz, which is typical for Link 16 networks. Generally, network 24 can operate at a different frequency range or have a different code than network 12 to avoid interference with network 12. Terminals 14 can include an NSA-controlled device called a Comsec/Transec Integrated Circuit (CTIC), more particularly, CTIC/DS-101 Hybrid (CDH). Preferably, network 24 communicates in an unencrypted format or a country-unique encrypted format. The term country-unique can refer to any entity or treaty organization. For example, the North Atlantic Treaty Organization (NATO), or a single country, such as, Germany, Taiwan, or Singapore can have its unique country code.

Optionally, communication system 10 can include a third network, such as, network 34. Network 34 is a wireless network including terminals 36. Terminals 36 communicate radio signals in a non-encrypted or in an encrypted format. Terminals 36 are similar to terminals 26 in network 24. To avoid interference, terminals 36 preferably do not communicate in the same frequency range or communicate the same code as networks 12 and 24 to avoid interference. A time division multiplexing technique can also be utilized to prevent interference among networks 12, 24, and 36.

Communication system 10 advantageously includes translators 52, 54, 56, and 58. Generally, terminals 14, 26, and 36 cannot transmit data or information between each other without the use of translators 52, 54, and 58. In this way, networks 12, 24, and 34 operate or communicate independently from each other.

Translator 52 allows communication between network 24 and network 12; translator 52 allows terminals 26 to communicate with terminals 14. Translator 52 translates information communicated by one or more of terminals 14 and provides the translated information in the format of network 24 for use by terminals 26. Translator 52 also translates information communicated by one or more of terminals 26 and provides the translated information in the format of network 12 for use by terminals 14.

Translator 52 is programmable or configurable to only provide certain types of information from network 12 to network 24. Generally, translator 52 only provides selected information from network 12 to network 24. Additionally, translator 52 can provide all of, or only some of, the information from network 24 to network 12. Translator 52 can include a message filter, which ensures that only selected information is transmitted from terminals 14 to terminals 26 and from terminals 26 to terminals 14.

Generally, translator 52 is programmed to relay all desired information between network 12 and network 24. Mission planning ensures that only appropriate information is relayed between networks 12 and 24.

In accordance with an exemplary embodiment of the present invention, the United States government (e.g. ,army, navy, airforce, or a combination thereof) can retain control of all Link 16 cryptological devices (terminals 14 and translator 52 are kept in its possession) and yet be able to communicate all desired information with cooperating countries through networks 24 and 34. Additionally, translator 52 maintains the confidentiality of other information not desired to be communicated and the confidentiality of Link 16 encryption.

Translator 54 is similar to translator 52 except that translator 54 allows terminals 14 to communicate with terminal 36. Similarly, translator 56 is similar to translator 52 and 54, except translator 56 allows terminals 26 to communicate with terminals 36. In such a case, translator 56 could be held by a neutral ally of the country associated with network 24 and the country associated with network 34 or by both countries or by a single one of the countries associated with network 24.

Translator 58 is similar to translators 52, 54, and 56, except translator 58 allows communication between three networks, network 12, network 24, and network 34. Translator 58 is configured to provide desired information from network 12 to networks 34 and networks 24. Similarly, translator 58 allows transmission of information from networks 24 and 34 to network 12. Translator 58 can also allow communication between networks 24 and 34.

With reference to FIGURE 2, a translator 80 can be utilized as any of translators 52, 54, 56, or 58. Preferably, translator 80 is provided on an optional platform 83. Platform 83 can be a land-based platform, a space-based platform, a naval-based platform, or an air-base platform. Translator 80 includes one or more antennas 85, a terminal 82 with encryption capabilities in a first format, and a terminal 84 with encryption capabilities in a second format or having no encryption capabilities. If only one antenna 85 is utilized, a time division circuit 81 ensures appropriate sharing of the single antenna.

Terminal 82 can be similar to terminal 14 (e.g., a Link 16 terminal). Terminal 84 can be similar to terminals 36 or 26. Terminal 82 is coupled to terminal 84 by a high-speed or fast rate-data link 86, a blanking interface 88, and a timing interface 92. Blanking interface 88 allows terminals 82 and 84 to share the communication medium without interrupting each other.

Translator 80 can be placed in a cargo plane, AWACS plane, or other aircraft and flown over the field of interest to provide translation for terminals 14, terminals 26, and terminals 36 (FIGURE 1). In such a case, translator 80 and information about terminal 82 (the Link 16 terminal) of translator 80 are advantageously kept in United States possession at all times and secured information is not provided to non-United States personnel. In addition, terminal platform 83 can be in an embassy building or other United States-controlled installation. Translator 80 can be designed to be deployed on rack for easy movement and placement.

Translator 80 can be modified for use as translator 58 by including a third terminal. The third terminal would share an interface with terminal 82 and terminal 84.

Translator 80 advantageously allows foreign governments to utilize a wireless network, such as, networks 24 and 34, which can be easily integrated into a Link 16 network without jeopardizing control of Link 16 terminals. For example, translator 80 can be flown to an embassy or a United States base in the area of operation and, through translator 80, networks 12 and 24 can be easily integrated. In addition, translator 80 can be programmed to provide selective transmission of data between networks 24 and 34. Further still, terminals 26 can be designed so that they cannot be converted to Link 16 type terminals. Therefore, the United States government can remain in control of all Link 16 terminals and yet allow some foreign governments to have some of the many advantages of wireless networks. Even further still, terminals 26 should not be easily converted to Link 16-types of terminals by

changing a single chip or single programming module. In addition, no maintenance is required to terminals 26 or 36 to allow operation with network 12.

It is understood that, while preferred embodiments, examples, materials, and values are given, they are for the purpose of illustration only. The apparatus and method of the invention are not limited to the precise details and conditions disclosed. For example, although Link 16 terminals are utilized, other types of wireless networks could be utilized. Thus, changes may be made to the details disclosed without departing from the spirit of the invention, which is defined by the following claims.

CLAIMS

WHAT IS CLAIMED IS:

1. 1. A translator for use with a first wireless network and a second wireless network, the first wireless network including first terminals communicating in a first encrypted format and the second wireless network including second terminals communicating in a second encrypted format or in a non-encrypted format, the translator communicating with the first terminals in the first encrypted format and the translator communicating with the second terminals in the second encrypted format or in the non-encrypted format, the translator communicating selected information from the first network to the second network.
2. The translator of claim 1, wherein the translator includes a message filter for allowing the selected information to be communicated from the first network to the second network.
3. The translator of claim 1, wherein the translator includes a message filter for allowing the selected information to be communicated from the first network to the second network, the message filter being programmable.
4. The translator of claim 3, wherein message filter includes a software module, the software module preventing sensitive information from being communicated from the first network to the second network.
5. The translator of claim 1, wherein the first terminals are secure Link 16 terminals.
6. The translator of claim 5, wherein the second terminals are Link 16-like terminals having country-unique encryption.

7. The translator of claim 1, wherein the translator is for use with a third wireless network including third terminals communicating in a third encrypted format, the translator communicating with the third terminals in the third encrypted format, the translator communicating second selected information from the first network to the third network.

8. A method of communicating in a communication network, the communication network including a first secure wireless network and a second secure wireless network, the first secure wireless network including first terminals and the second secure wireless network including second terminals, the method comprising:

communicating data among the first terminals in a first format;

communicating data among the second terminals in a second format;

translating selected data in the first format to translated data in the second format; and

communicating the translated data to the second terminals.

9. The method of claim 8, wherein the first terminals are secure Link 16 terminals.

10. The method of claim 9, wherein the second terminals are Link 16 like terminals having country unique encryption.

11. The method of claim 8, wherein the communication network includes a third wireless network including third terminals, the method further comprising:

communicating among the third terminals in a third format;

translating second selected data in the first format to second translated data in the third format; and

communicating the second selected data to the third terminal.

12. The method of claim 8 further comprising:

translating the data in the second format to the data in the first format; and

communicating the translated data among the first terminals.

13. The method of claim 12, wherein the translating step is performed to be a translator under control of a United States organization.

14. The method of claim 8, wherein the first terminals are under control of a first entity, and the second terminals are under control of a second entity, and the translating step is under control of the first entity.

15. A communication system comprising:

a first means for communicating radio signals in a first encrypted format;

a second means for communicating radio signals in a second encrypted format or in a non-encrypted format; and

a translator means for communicating with the first means in the first encrypted format and for communicating with the second terminals in the second encrypted format or in a non-encrypted format, the translator means communicating selected data from the first means to the second means.

16. The communication system of claim 15, wherein the first means are Link 16 terminals.

17. The communication system of claim 15 further comprising:

third means for communicating radio signals in a third format, wherein the translator means communicates selected data from the first means to the third means.

18. The communication system of claim 16, wherein the translator means operate from a platform under United States government control.

19. The communication system of claim 18, wherein the translator means is located in an aircraft.

20. The communication system of claim 15 further comprising:

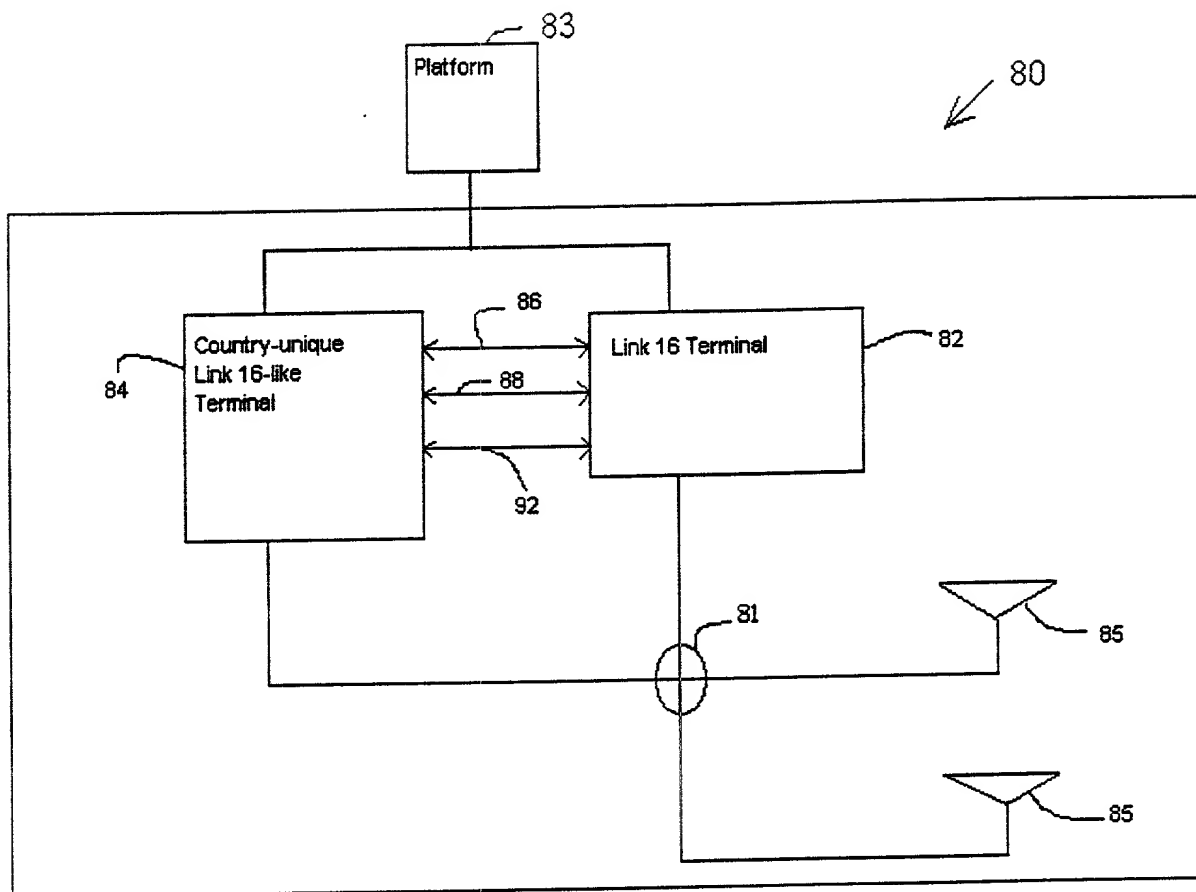
third means for communicating radio signals in a third format, and

second translator means for communicating with the first means in the first encrypted format and for communicating with the third terminals in the third format, the second translator means communicating second selected data from the first means to the third means.

ABSTRACT

A translator terminal for use with two or more wireless networks is disclosed. The translator terminal allows a first network to communicate with first-type terminals in an encrypted form and a second network to communicate with second terminals in an encrypted form. The translator terminal allows information from the first terminal to be translated to the second terminals, without jeopardizing the encryption format utilized by the first terminals. The translator could be utilized to translate selected information from a Link 16 network to another network.

FIGURE 2



664650 "9927E60

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

Docket #99CR021/KE

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **Translator Terminal For Two Or More Wireless Networks**, the specification of which:

(check one) ☒ is attached hereto.☐ was filed on _____ as☐ Application Serial No. _____
and was amended on _____

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s) None

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:


_____ (Application Serial Number)	_____ (Filing Date)	_____ (Status -patented, pending, abandoned)
_____ (Application Serial Number)	_____ (Filing Date)	_____ (Status -patented, pending, abandoned)


I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Kyle Eppele, Reg. #34,155, James P. O'Shaughnessy, Reg. #27,667, John J. Horn, Reg. # 28,803, John M. Miller, Reg. # 38,560, John J. Deinken, Reg. # 28,406, and William R. Walbrun, Reg. # 37,464.

Address all telephone calls to Kyle Eppele at telephone no. (319) 295-8280Address all communications to Rockwell Collins, Inc.Attention: Kyle Eppele M/S 124-323400 Collins Rd. NECedar Rapids, Iowa 52498

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor David H. DeckerInventor's Signature David H. DeckerResidence Marion, Iowa 52302Post Office Address 1491 41st St. PlaceMarion, Iowa 52302Date 5-24-99Citizenship USAFull name of second joint inventor, if any Gerald W. EgebergSecond Inventor's Signature Gerald W. EgebergResidence Cedar Rapids, Iowa 52402Post Office Address 1702 Fox Trail Dr. NECedar Rapids, Iowa 52402Date 5-24-99Citizenship USAFull name of third joint inventor, if any James F. EnglishThird Inventor's Signature James F. EnglishResidence Cedar Rapids, Iowa 52403Post Office Address 741 30th Street SECedar Rapids, Iowa 52403Date 5-24-99Citizenship USA

Full name of fourth inventor Gene S. Parker
Inventor's Signature  Date 5/24/99
Residence Cedar Rapids, Iowa 52411 Citizenship USA
Post Office Address 5860 Wells Lane
Cedar Rapids, Iowa 52411

Full name of fifth joint inventor, if any Scott J. F. Zogg
Fifth Inventor's Signature  Date 5/24/1999
Residence Cedar Rapids, Iowa 52411 Citizenship USA
Post Office Address 2765 Tower Dr.
Cedar Rapids, Iowa 52411

00442760